


# Aluminium Foil

## *Double-Sided Aluminium Foil*

Non-vapour-permeable foil with both sides in aluminium and kraft paper in between. It is used in various construction applications.

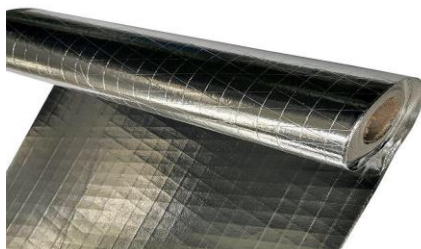

### Characteristics

- Aluminium surface in both sides
- Non vapour permeable
- UV-radiation reflective

### Packaging

Rolls of 1.25 x 50 m (=62.5 m<sup>2</sup>)

### Fields of Applications

The product can be used in broad range of application in construction including:

- As a subsidiary protective layer against moisture and wind in ventilated pitched roof structures
- As a subsidiary protective layer in ventilated facades
- As protective layer to mineral thermal insulation products such as glasswool and rockwool
- As a radiant layer in electric underfloor heating applications

### Warning

Although the technical details and recommendations contained in this product report correspond to the best of our knowledge and experience, all above information must, in every case, be taken as merely indicative and subject to confirmation after long-term application; for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application; in every case, the user alone, is fully responsible for any consequences deriving from the use of the product.

IMPORTERS/ DISTRIBUTORS: