


Domoseal[®] Dust-Stop

V 2023/10

Concrete floor dust-proofer and hardener

Domoseal[®] Dust-Stop is a ready to use silicate-based surface hardener and dust-proofer which reacts chemically with the concrete to produce a hard, dust-free finish.

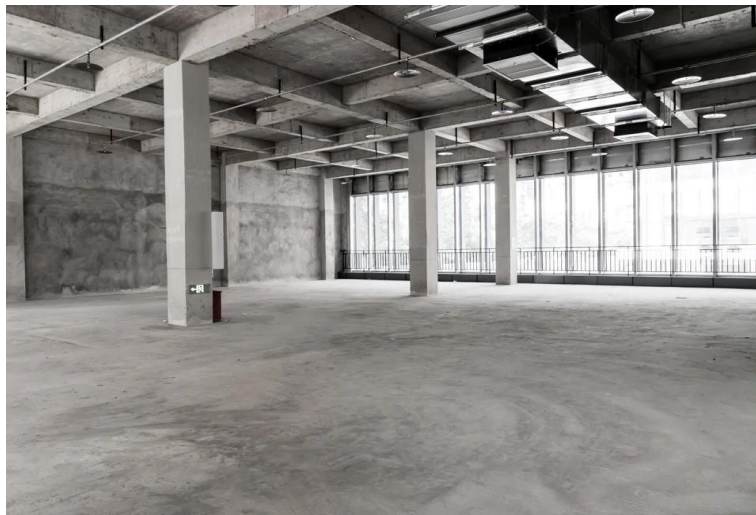

Characteristics

- Ready to use
- Easy to apply
- Good penetration
- Suitable for both new and old concrete floors

Features & Advantages

Domoseal[®] Dust-Stop can be used on both new and old concrete floors, as well as on natural stone. It penetrates through the pores of the surface and reacts with free lime or calcium salts of the material, enhancing the surface hardness. It therefore contributes in a positive way in abrasion resistance, dust proofness and permeability of the surface in which it is applied. The product is supplied in a ready-to-use form.

IMPORTERS/ DISTRIBUTORS:

Domochemica Co. Ltd

www.domochemica.com.cy

2, Propylaeon Str., Strovolos Industrial Zone

P.O. Box 28928 2084 Nicosia / Cyprus

Tel : +357 - 22 31 27 10

Fax: +357 - 22 42 06 51

Fields of Application

- Reduces the dust formation of the concrete surface in which it is applied
- Reduces the permeability of the surface in which it is applied
- Increases the abrasion resistance of the surface in which it is applied

Safety Instructions

Product for professional use only. Protect the skin and eyes from splashes. Wear protective clothing including gloves and safety goggles. In case of splashing on the skin or eyes treat with fresh water immediately.

Packaging

- 20 ltr plastic pail
- 200 ltr metal drum

Warning

Although the technical details and recommendations contained in this product report correspond to the best of our knowledge and experience, all above information must, in every case, be taken as merely indicative and subject to confirmation after long-term application; for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application; in every case, the user alone, is fully responsible for any consequences deriving from the use of the product.

IMPORTERS/ DISTRIBUTORS:

Application Instructions

Domoseal® Dust-Stop is ready to use straight from its packaging and can either be sprinkled over the surface with the aid of a sprayer, or applied over the substrate with a roller. Apply the product only on sound, dry and free from any loosely-adhered materials. In cases of new concrete, ensure that it is at least 28 days old before applying the product. Apply **Domoseal® Dust-Stop** over the surface to ensure maximum and even penetration. Do not allow puddles to form on flat surfaces. Normally two coats are sufficient, but in some cases a third coat is beneficial. Allow a waiting time of ~ 24 hrs (+20 °C) between coats. A day after the final treatment, the floor should be washed with clean water.

Consumption

Depending on the surface texture and its inherent porosity, 2 - 3 coats are recommended at a consumption of ~ 0.15 - 0.20 ltr/m² per coat.

Technical Data

PROPERTIES	VALUES
Density	1.1 kg/ltr
pH	10 - 11
Colour	Transparent
Solvent	Water

Storage - Shelf Life

The pails and drums must be stored in a covered area away from direct sunlight. Under these conditions, the product has a shelf life on 12 months.

Domochemica Co. Ltd

www.domochemica.com.cy

2, Propylaeon Str., Strovolos Industrial Zone

P.O. Box 28928 2084 Nicosia / Cyprus

Tel : +357 - 22 31 27 10

Fax: +357 - 22 42 06 51